



### Parts List


(A) Tower	(G) Caster	(M) Nut (1/2" - 13)
(B) Base Frame	(H) Bolt (3/8" - 16, 2.25" L)	(N) Washer (3/8")
(C) X-brace	(I) Short Bolt (3/8" - 16, .75" L)	(O) Lock Washer (3/8")
(D) Shelf Arm	(J) Clevis Pin	(P) Nut (3/8" -16)
(E) Containment Bumper	(K) Cotter Pin	
(F) Caster w/ Brake	(L) Lock Washer (1/2")	

### Included Tools

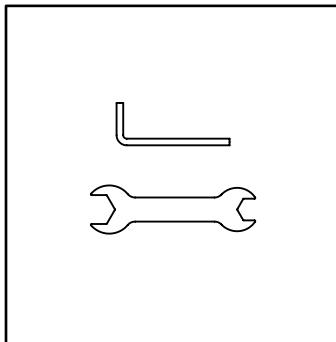


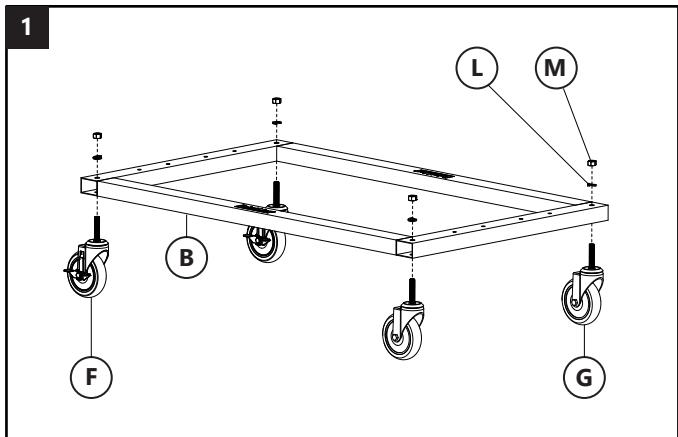


- Attach casters (G) and casters w/brake (F) to base frame (B) with four lock washers (L) and four nuts (M).

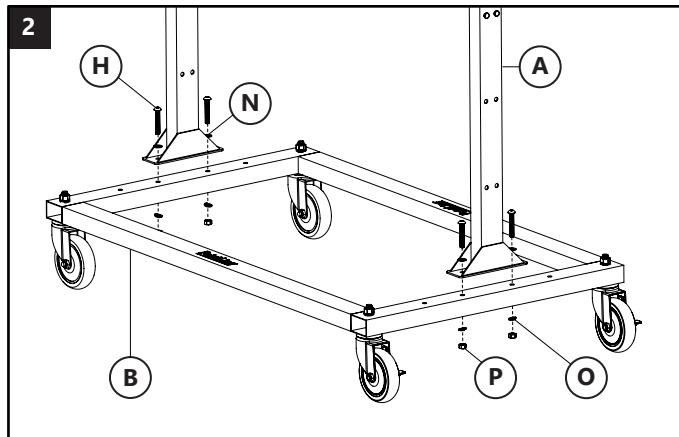

- Secure towers (A) to base frame (B) with four bolts (H), four washers (N), four lock washers (O), and four nuts (P).

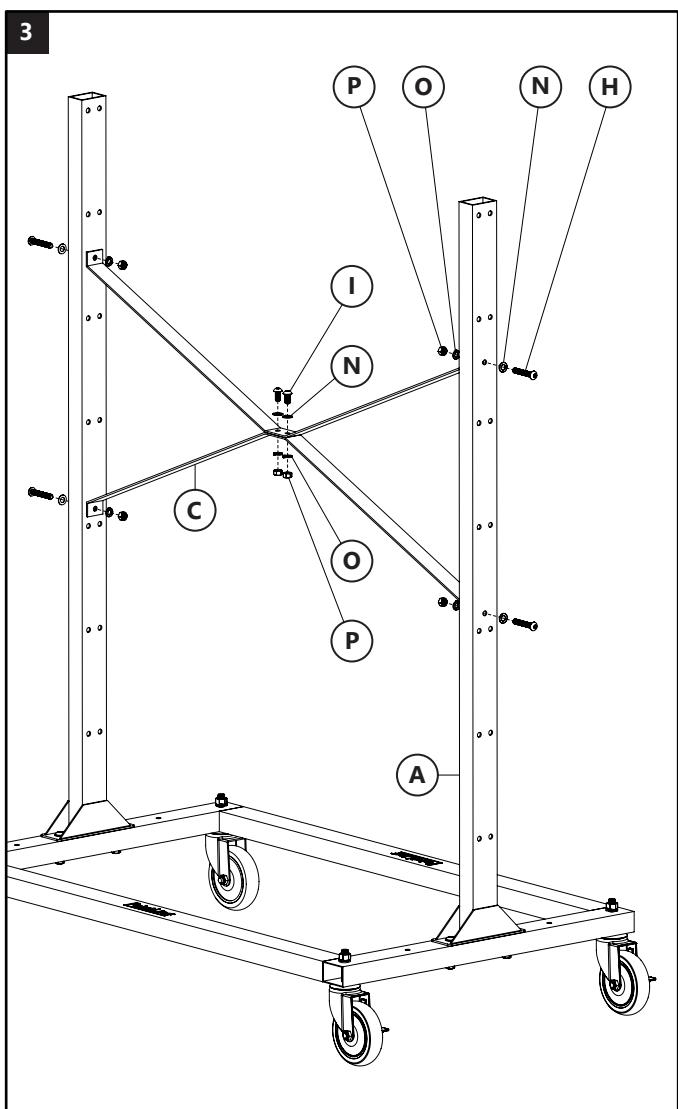

- Connect x-braces (C) together using two short bolts (I), two washers (N), two lock washers (O), and two nuts (P). Secure to towers (A) using four bolts (H), four washers (N), four lock washers (O), and four nuts (P).

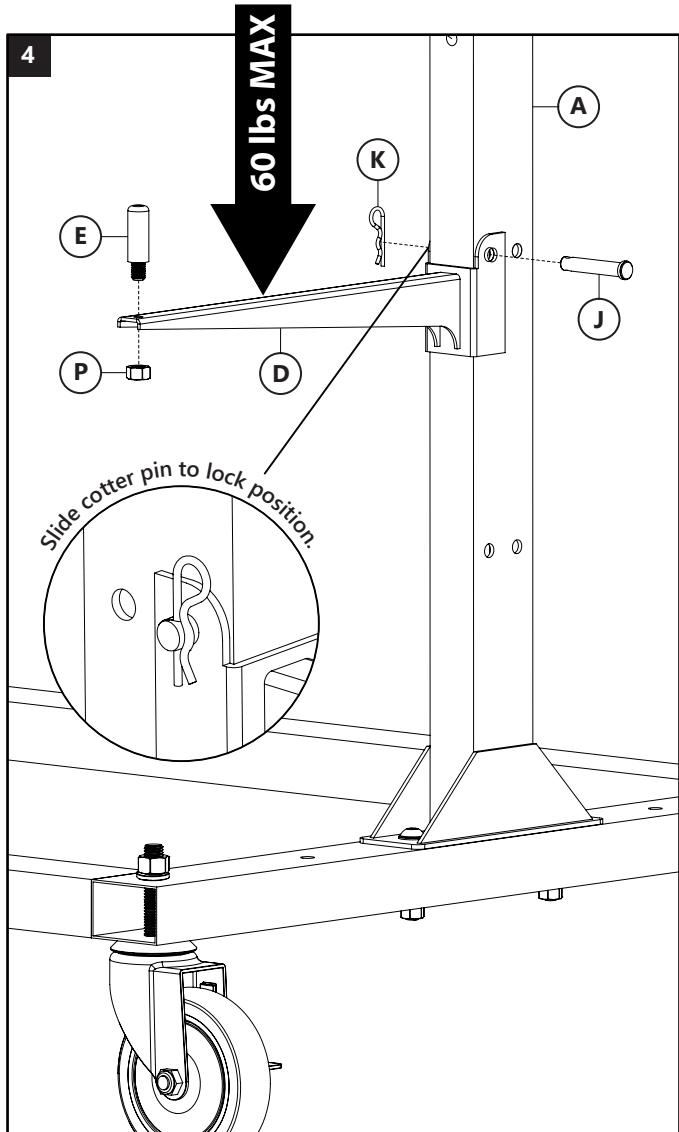

- Attach shelf arm (D) to tower (A) using clevis pin (J), and cotter pin (K). Hand-tighten containment bumper (E) to arm (D) using nut (P). Repeat for remaining arms. Capacity is 60 lbs per arm when weight is evenly dispersed.